

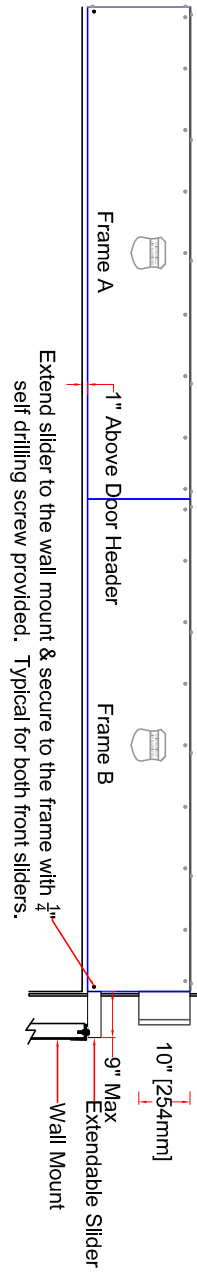


Vertical or High Lift OH Door Shown
Consult Factory for standard lift door installations

FRONT VIEW

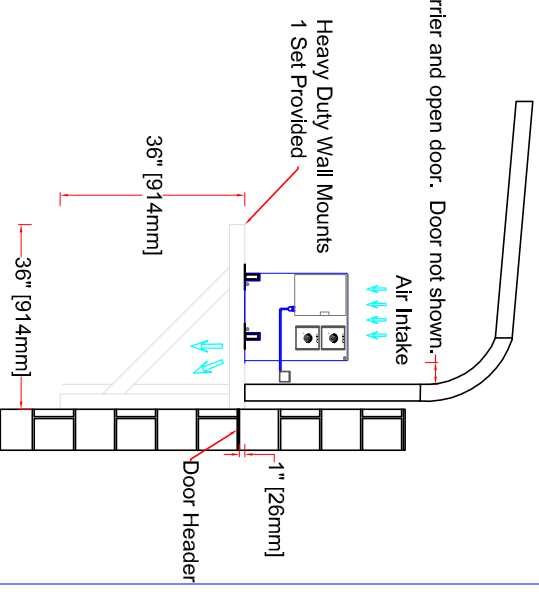


BOTTOM VIEW

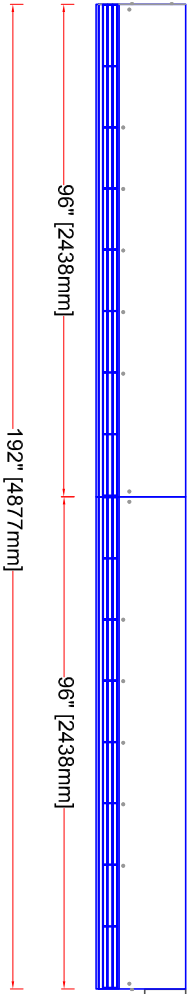


Slider Mounting Detail


Field drill $\frac{7}{16}$ " holes into the wall mount and bolt sliders with the $\frac{3}{8}$ " hardware provided

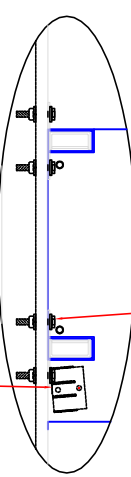

Adjust the diffuser 10-15 degrees towards the exterior of the building. Confirm diffuser adjustment after power has been supplied to the Air Barrier. See owners manual.

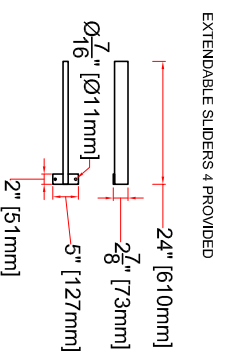

EXTENDABLE SLIDERS 4 PROVIDED

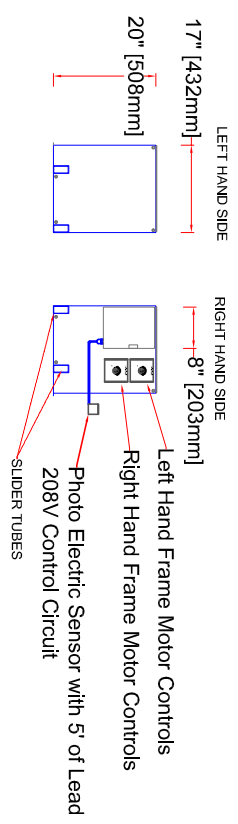

CSA & CWB CERTIFIED Motor Speed Controls Available in 208V Only!

ENERSHIELD INDUSTRIES LTD

16821-113 AVENUE
EDMONTON, ALBERTA T5M 2X2
PH (780) 482-4662 FAX (780) 482-4074
E-mail: info@enershield.ca
www.enershield.ca

ENERSHIELD AIR CURTAIN

VOLTAGAGE 208V 1phase 60 HZ	VOLTAGAGE 575V 1phase 60 HZ	Blowers 8	DURASHIELD	DS-192
MOTOR (S) 8 @ 1/2 hp = (4 hp total)	MOTOR (S) 8 @ 1/2 hp = (4 hp total)	ORDERED DATE	Air Velocity (fpm) (m/s)	4500/22.9
3.7 amps ea. = 28 amps FLA	1.2 amps ea. = 9.6 amps FLA	SHIPPED	Air Volume (cfm) (l/s)	11300/5333
			Total hp/watts	4 hp/2984W
			Weight lbs/Kg	800lbs/364Kg