

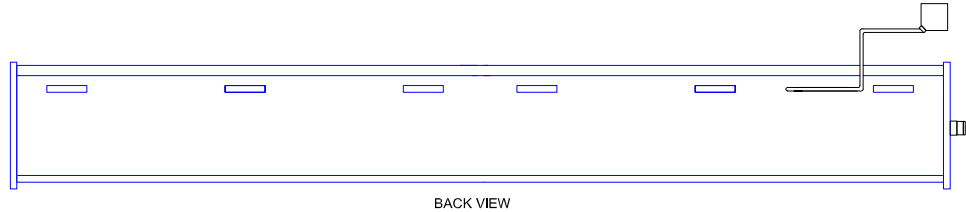


Wall mount can be fixed directly to wall, or may be secured to the extension brackets to extend Barrier off the wall.

Sensor Mounting Bracket-2 Provided.




BACK VIEW



BOTTOM VIEW


Photo Sensor with 5' of lead

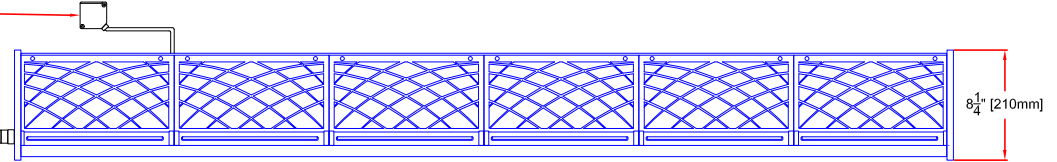


TOP VIEW

3 Position Keyed Switch Hand/Off/Auto Key removable in all 3 positions.



Fan speed selector

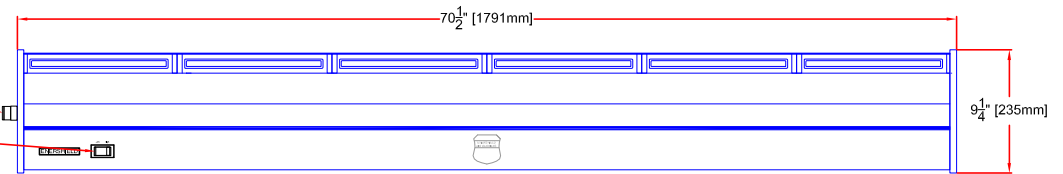

FRONT VIEW

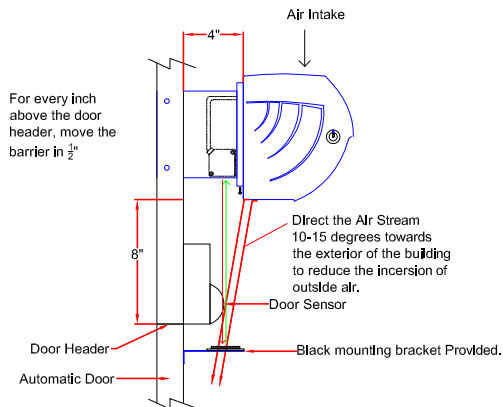

Min 2" of clearance to ceiling.

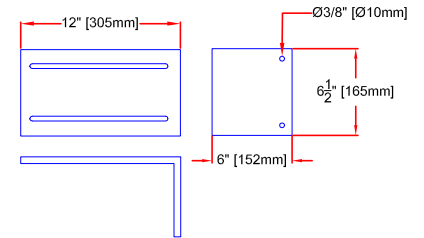

EXTENSION BRACKET 2 Provided See Owners Manual for Details

CSA CERTIFIED

**ENERSHIELD INDUSTRIES LTD**  
 16821-113 AVENUE  
 EDMONTON, ALBERTA T5M 2X2  
 PH (780) 482-4662 FAX (780) 482-4074  
 E-mail: info@enershield.ca  
 www.enershield.ca

Available in White, Black and Aluminum

VOLTAGE 120V/1/60 Hz  
 2 Speed Motors TEAO  
 3 @ 1/5 hp = (3/5 hp total)  
 Total FLA = 5.25 amps

Designed for optimal efficiency at 7" (2133mm) with balanced building pressure. Consult dealer for varying applications.  
 6 Blowers

Project:  
 Engineer:  
 Tag:

**MICROSHIELD**

**MCS-72-AA**

Air Velocity (fpm) (m/s)	3651-3223/18.5-16.4
Air Volume (cfm) (l/s)	2925-2582/1380-1219
Total hp/watts	3/5 hp/447W
Weight lbs/Kg	57.2 lbs/26 Kg